EET

PAGE	1 OF 1

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
GYY	WU.J	RELEASE TO PRODUCTION	2006.01.25	01

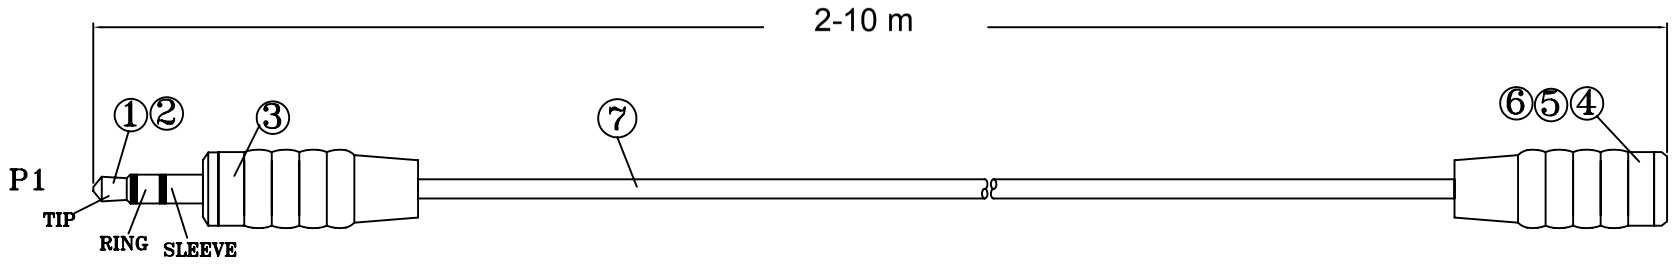

3.5ST/M ASS'Y TYPE

3.5ST/F ASS'Y TYPE

PIN OUT

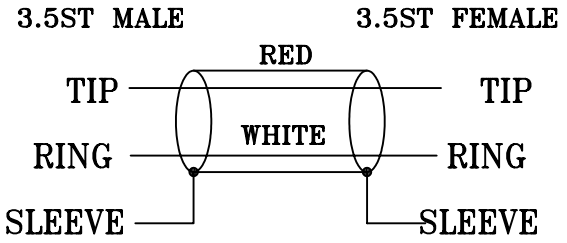

NOTE:

1.CABLE 1:[(26AWGx2C)+SP]x1 INSULATOR BLACK(BK01) PVC OUTER JACKET PVC.OD:4.0±0.2 BLACK IN COLOR
2.CONNECTORS: 3.5ST MALE TO 3.5ST FEMALE
3.HOOD:ASS'Y TYPE
4.ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
<2>.INSULATION RESISTANCE: DC400V 10Mohm MIN
<3>.CONDUCTOR RESISTANCE: 10 ohm MAX
5.PACKING:1PC/BLISTER+CARD

MATERIAL LIST:

NO.	PART NO.	PARTS NAME	SPECIFICATION STANDARD	Q'TY	REMARK
①	CA-ST-M-0018	3.5ST/M-CONTACT	BRASS GOLD PLATED	3	YEONG DER E335S-45
②		3.5ST/M-INSULATOR	POM/BLACK UL 94V-0	2	
③		3.5ST/M-SHELL	BRASS BLACK GUN PLATED ID:4.5mm	1	
④		3.5ST/F-CONTACT	BRASS GOLD PLATED	3	YEONG DER E335SJ-45
⑤		3.5ST/F-INSULATOR	POM/BLACK UL 94V-0	2	
⑥		3.5ST/F-SHELL	BRASS BLACK GUN PLATED ID:4.5mm	1	
⑦	KL08510ABK01B	CABLE	[(26AWGx2C)+SP]x1,BLACK IN COLOR(#BK01)	1	
⑧		MINI TIE	PE/BLACK	1	
⑨		BLISTER+CARD		1SET	

APPROVE	CHECK	DRAW	PI NO.			
			ITEM NO.	AUDLRxxH		
			DRAW NO.	0082ET		
			UNIT	mm	SCALE	
			TOLERANCE		NO.	

DESCRIPTION
3.5ST/M-3.5ST/F

FM-108

PAGE	1 OF 1

WIRE CONFIGURATION

DATE	REVISION RECORD	REV.
2006.01.25	ORIGINAL	01

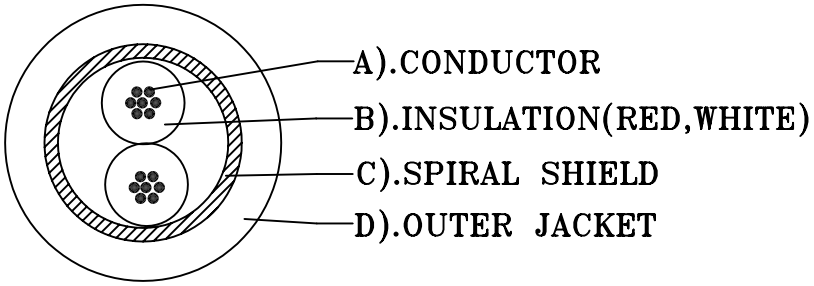

SPECIFICATION		DESCRIPTION
CABLE SPEC		[(26AWGx2C)+SP]x1
CONDUCTOR	MATERIAL	(A)BARE COPPER
	FABRICATE	7/0.16
INSULATION	MATERIAL	(B)PVC
	AVG.THICK	0.26±0.05mm
	DIAMETER	1.0±0.05mm
SHIELD	MATERIAL	(C)BARE COPPER
	FABRICATE	35/0.12
DRAIN WIRE	MATERIAL	
	FABRICATE	
BRAID	MATERIAL	
	FABRICATE	
OUTER JACKET	MATERIAL	(D)PVC<UL70P BK01>
	AVG.THICK	0.87±0.05mm
	DIAMETER	4.0±0.2mm
PRINT WORD		
TEST REQUEST		

CABLE NO.	KL08510ABK01B
DRAWING NO.	051008
ITEM NO.	

APPROVE	CHECK	CHECK	DRAW